


NS-47U 氣動釘鈕機一連十字定位燈及安全罩

Pneumatic Snap Fixing Machine with Light Marker & Safety Guard

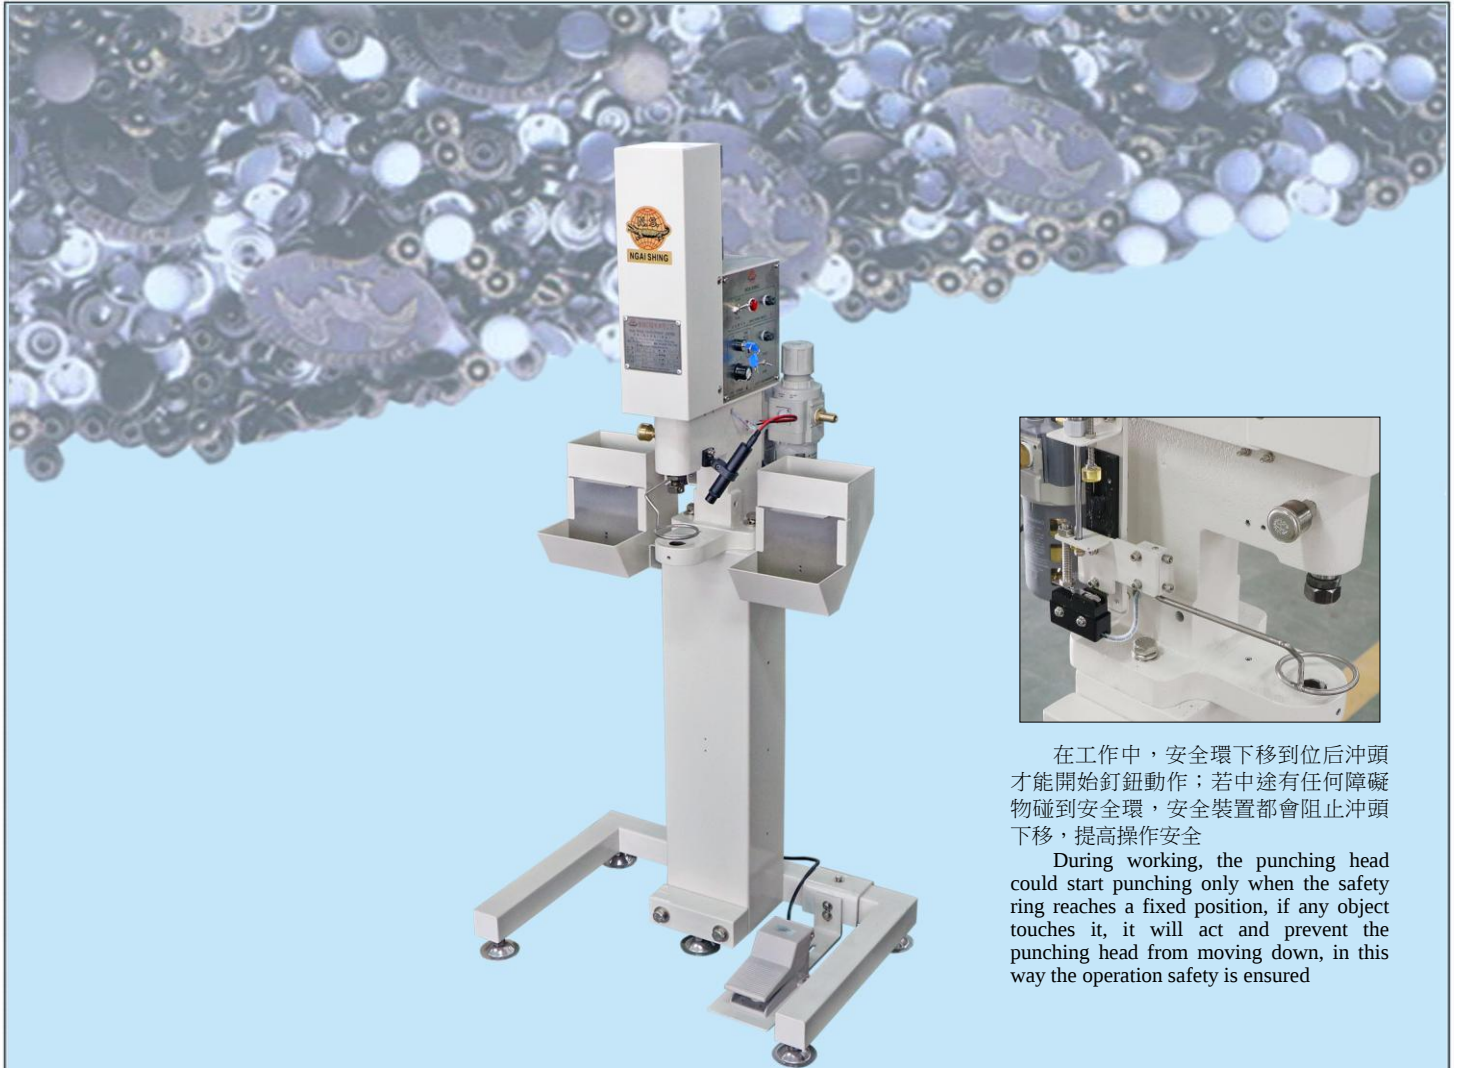

在工作中，安全環下移到位后沖頭才能開始釘鈕動作；若中途有任何障礙物碰到安全環，安全裝置都會阻止沖頭下移，提高操作安全

During working, the punching head could start punching only when the safety ring reaches a fixed position, if any object touches it, it will act and prevent the punching head from moving down, in this way the operation safety is ensured

- 適用於沖壓衣物上或真皮、塑膠布料上的鐵鈕、膠鈕、珍珠鈕、工字扣等鈕扣
- 採用氣動加壓，加壓壓力可調，沖力強中帶柔，沖壓效果佳
- 沖壓到尾時能停在可調校的指定時間後回位，使鈕扣更堅固沖合
- 十字鐳射定位燈，定位準確，操作簡便
- 安全防護裝置帶有導軌設計，操作安全

選購件：

- 各種鈕模
- O-G-03-1 檯面板
- O-G-07-1 壓力保護裝置

- Suitable for punching iron button, plastic button, pearl button and jeans button on garment, genuine leather, plastic fabric, etc.
- Adopt pneumatic punching with adjustable pressure. Perfect coordination between strong impact and tenderness to result in excellent stamping effect
- Before resetting, the punching head can stay for a preset time (adjustable) at stroke end to ensure high quality of button attaching
- Cross laser marker for accurate positioning and easy operation
- Operational safety ensured by protective device with guide rail

Optional Accessories:

- Various button moulds
- O-G-03-1 Table top
- O-G-07-1 Pressure protective device

選購件Optional Accessories:




珍珠鈕模 Pearl Button Moulds



工字扣模 Jeans Button Moulds




五爪鈕模 Five Claw Button Moulds

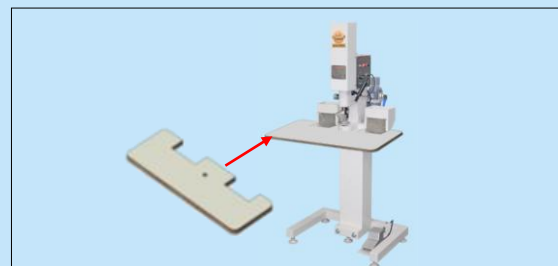

檯面板 Table top



壓力保護裝置，可在氣壓不足時停止機器沖壓動作，有效保護因沖壓壓力不夠導致的釘鈕質量問題
Pressure protective device may suspend stamping action to prevent button sewing quality issues under circumstances of pressure insufficiency

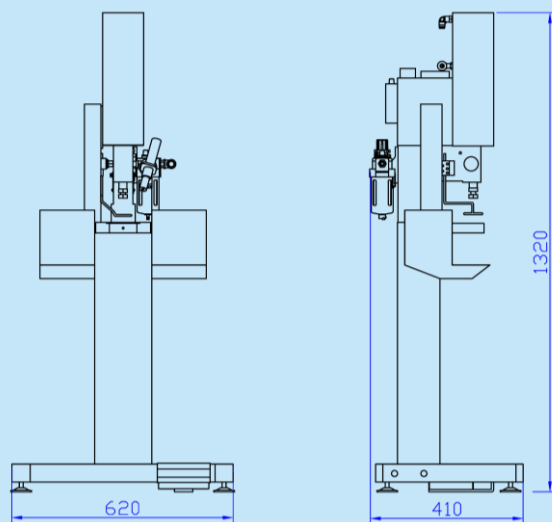

機身外形尺寸圖
Machine external
dimensions diagram

型號 Model	電源 Power Supply	總功率(kW) Total Power	壓縮空氣壓力(kgf/cm ²) Compressed Air Pressure	耗壓縮空氣量 (L/min) Compressed Air Consumption	最大沖程(mm) Max. Stroke	最大壓力(kgf/cm ²) Max. Pressure	淨重(kg) Net Weight	機身尺寸 (mm) Machine Size
NS-47U	1PH/220V/50Hz	0.1	5	50	50	390	62	620x410x1320



藝誠(余氏)發展有限公司
Ngai Shing Development Limited

香港九龍長沙灣永康街52號地下
G/F., 52 Wing Hong St.,
Cheung Sha Wan, Kln., Hong Kong.

Tel: (852) 2741 9981, 2742 0078 E-MAIL: info@ngaishing.com
Fax: (852) 2785 3149 Http://www.ngaishing.com